


9" Multi-Voltage, Multi-Standard Color Monitor

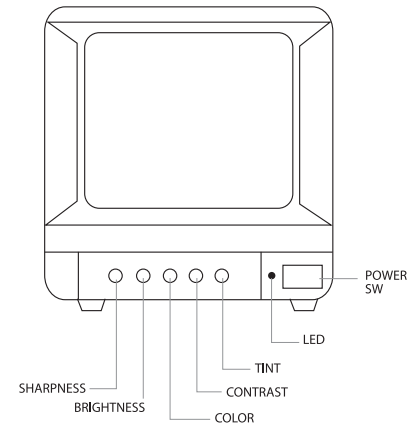

VM905C

- NTSC/PAL system auto switchable
- With Y/C, composite video input
- Wide range power source (90V AC~260V AC)
- High performance
- Dual comb-filter
- Front controls hidden behind a door

Specifications

Picture Tube	9" Flat Tube
Horizontal Resolution	500 TV Lines
Power Source	90~260V AC
Power Consumption	40 Watts
Scanning System	NTSC/Pal Auto Switchable
Input Signal	(A) Composite Video 0.5~1.0V p-p Neg. Sync (IN 75) (B) Y/C Signal Y: 1.0V p-p W/Neg. Sync (IN 75)
Bandwidth	100 Hz~6.5MHz (-3dB)
Linear Distortion	Horizontal / Vertical 10% (Max)
Input Connector	Video BNC, Y/C 4PIN DIN JACK
Output Terminal	75 Ohm - high impedance switchable
Front Panel Controls	Contrast / Brightness / Color / Sharpness / Tint / On Off
Rear Panel Controls	V-Size, Sub-Bright, Focus, Screen, Impedance
Operation Temperature	14°F ~ 122°F
Dimensions	8.66" W x 8.78" H x 11.26" D
Net/Gross Weight	15.4 lbs. / 17.6 lbs.
Packing	2PCS / CTN / 3.20'

Specifications subject to change

For more information contact us at:

Speco Technologies 200 New Highway, Amityville, NY 11701 Web: www.specotech.com
Toll Free: 1-800-645-5516 In Metro NY: 631-957-8700 Fax: 631-957-9142 or 631-957-3880

VM905C